

Walker 2080 Mk2



Wind Speed and Direction System

The Walker 2080 MK2 uses a Solid State Ultrasonic Wind Speed & Vane Direction Sensor, the P292. This gives high accuracy in a robust compact package... **with no moving parts to wear out!**


The Sensor connects directly to a standard Walker DIN 144 wind speed & direction indicator, the P1249, which gives digital displays of relative wind speed & direction. Wind direction is also displayed on a simulated analogue display by use of OLED technology.

True wind systems are available by using this sensor with the Walker P1066 True Wind Interface Unit.

Proven Accuracy and Reliability



陕西威瑞仪器仪表有限公司 主营全球知名：气象环境仪器设备、智能科学仪器
TEL:029-88186182 WEB:www.go1go.com EMAIL:sxvery@163.com

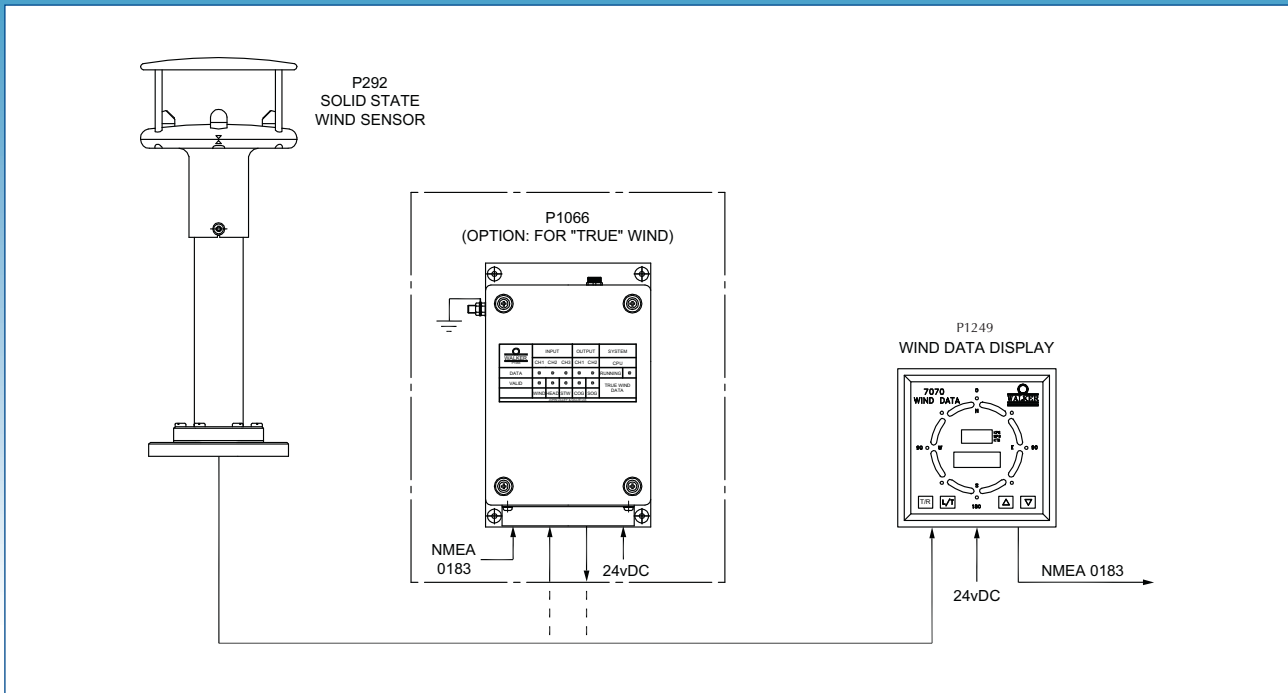

Specification

System

The sensor converts wind speed and direction into serial digital data. Data is displayed by the P1249 Indicator in digital format and also in analogue for wind direction. The instrument interfaces in NMEA 0183/RS422 to other ship systems. Sentence – MWV

Sensor

Mounting by base flange, with 3 elongated slots.
Sealed to IP65 (when correctly mounted)
Weight: 1.6 Kg
plus 3kg for 40 metre cable and connector assembly.

Indicator

Standard DIN 43700 case; 144 x 144 mm – depth 110mm
Weight: 1.2 Kg
Mounted by panel clips or drilled frame supplied.
Cables: 4.5 to 7 mm dia.
Controls: Illumination
Lamp Test
Select Units, Knots, Metres/Sec and Kilometres/Hour.
Front panel splash proof when installed correctly.

CE Indicator Type Approved to
EMC European Directive IEC 60945

In accordance with our policy of continuous development, changes may be made from time to time without prior notice.

Walker 2080 Mk2 Wind Speed & Direction System, using P292 Combined Sensor Unit

System Parameters

Input voltage: 24v DC 40mA

Wind Speed Measurement:

Range 0–120 knots
Accuracy +/- 2% (@ 24kts)
Resolution 0.01 knots

Wind Direction measurement

Range 0°–359°
Accuracy +/- 3° (@ 40 kts)
Resolution 0.1°

Environmental

Operating Temperature:

Sensor -35 °C to +70 °C
Indicator 0 °C to +55 °C

Storage Temperature

Sensor -40 °C to +90 °C

Humidity <5% to 100%

Option:

2080 Mk2 Wind Speed
& Direction True System,
P1066 True Wind
Interface Unit



EQUIPMENT

Directing International Shipping since 1812

LILLEY & GILLIE

陕西威瑞仪器仪表有限公司 主营全球知名：气象环境仪器设备、智能科学仪器
TEL:029-88186182 WEB:www.go1go.com EMAIL:sxvery@163.com